

Ride Indexer

Evaluating the ride comfort with a software which determines relevant indicators according to all international guidelines.

RIDE COMFORT

Railway vehicles are exposed to mechanical whole-body vibrations which influence the ride comfort for passengers and vehicle drivers. Crucial influencing factors are suspension, bogie, state of the wheels etc.

By means of technical test procedures which are described in national and international standards and guidelines, the vehicle's state of comfort can be evaluated. Hence, the standards ISO 2631-1, ISO 2631-4, VDI 2057 and the evaluation according to Sperling's system comprise procedures and calculations to evaluate the ride comfort of railway vehicles.

FEATURES


- Triaxial "plug and play" sensor (no further configurations are required!)
- Easy-to-operate software
- Result protocol
- Calculation according to ISO 2631-1, ISO 2631-4, VDI 2057 and Sperling's system





FUNCTIONALITY

The overall system consists of a notebook and a triaxial accelerometer which is connected to the USB port of the laptop. The accelerometer's signal is evaluated by a software. The result is provided by key figures. The result can be printed and saved as PDF-file.

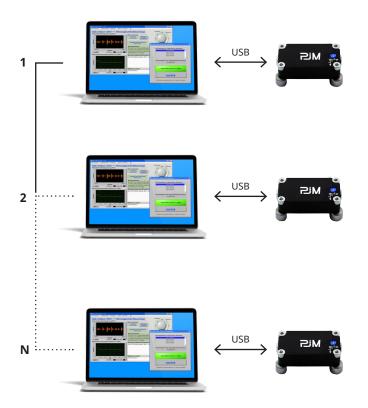

KEY FIGURES of triaxial sensors

| Features | | |
|--------------------------------------|----------------------------------|--|
| - Final value | +/- 5 g | |
| – Band | 0–2,5 kHz | |
| – Resolution | 0,0025 m/s² | |
| - Ground noise | 0,075 m/s² | |
| Format | | |
| - Dimensions | 30 x 55,5 x 15 mm | |
| – Weight | 55 g | |
| - Cable length | 3 m (extension to 30 m possible) | |
| – Fitting | magnetic | |
| Connection | | |
| - Communication | USB 2.0 | |
| - Power consumptio | n in operation 200 mA | |
| Environmental data | | |
| - Protection class | IP67 | |
| Shock resistance | 10.000 g | |
| – Temperature | 0-70 °C | |
| - CEI UNI | EN 61000-6-2 | |
| - CEI UNI | EN 61000-6-4 | |

System requirements

Hardware

- 1,2 GHz CPU
- 512 MB RAM
- 2 USB ports (for possible higher power supply)

Optional

Port of a USB hub with external power supply with 2 USB ports

Software

- Windows XP SP 3 or higher
- 35 MB memory capacity
- Display resolution 1024 x 768
- Adobe Acrobat Reader (free version on www.adobe.com/at)

Lina Popetschnigg, MSc Measurement & data analysis

PJ Messtechnik GmbH Waagner-Biro-Straße 125 8020 Graz, Austria

Mobile: +43 676 4571977 eMail: popetschnigg@pjm.co.at



PM